


The **12F4003** is a low-loss, compact, and economical surface-acoustic-wave (SAW) filter in a surface-mount ceramic **QCC8C** case designed to provide front-end selectivity in **433.920** MHz receivers. Receiver designs using this filter include superhet with 10.7 MHz or 500 kHz IF, direct conversion and superregen.

**1. Package Dimension (QCC8C)**

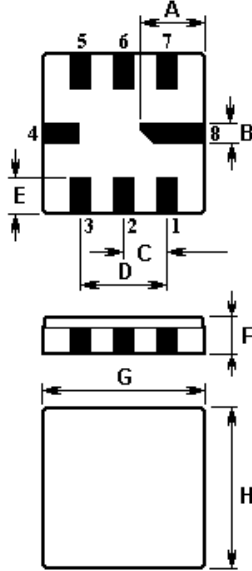


Pin	Connection
1	Input Ground
2	Input
5	Output
6	Output Ground
3, 7	to be Grounded
4, 8	Case Ground

Sign	Data (unit: mm)	Sign	Data (unit: mm)
A	2.08	E	1.20
B	0.60	F	1.35
C	1.27	G	5.00
D	2.54	H	5.00


**2. Marking**

**Q**  
**F433H**  
Laser Printing

**3. Test Circuit**

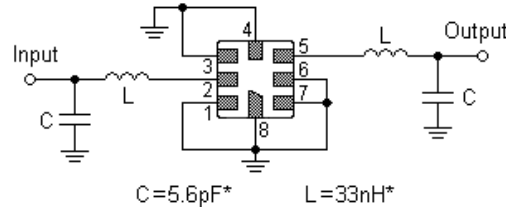

**4. Typical Frequency Response**

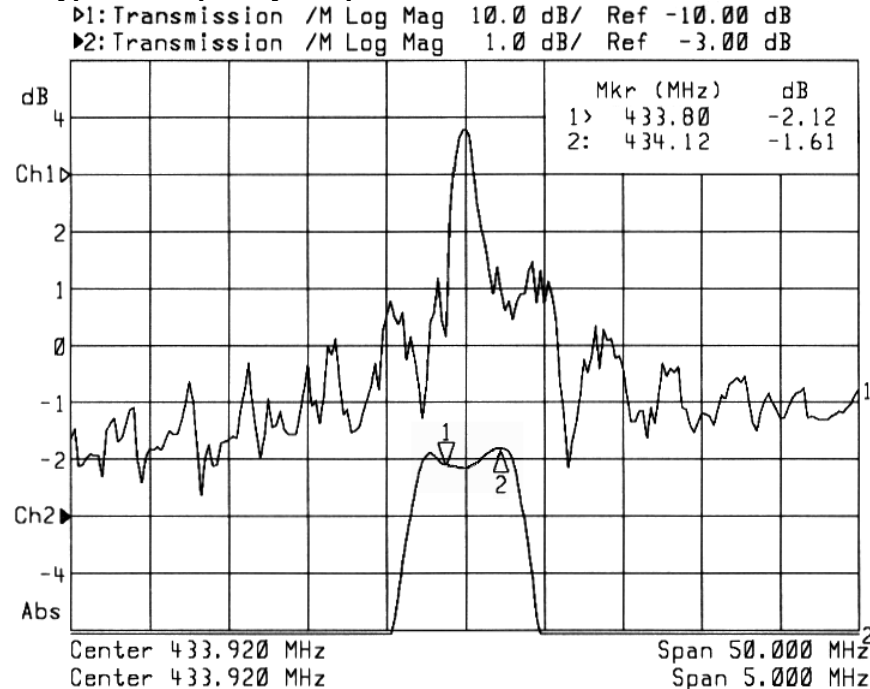

## 5. Performance

### 5-1. Maximum Ratings

Rating		Value	Unit
Input Power Level	$P$	10	dBm
DC Voltage	$V_{DC}$	0	V
Operable Temperature Range	$T_A$	-45 to +120	°C
Storage Temperature Range	$T_{stg}$	-45 to +120	°C

### 5-2. Electronic Characteristics

Reference temperature:  $T_A = -45 \dots +95 \text{ } ^\circ\text{C}$

Characteristic		Minimum	Typical	Maximum	Unit
Center Frequency (center frequency between 3dB points)	$f_c$		433.920		MHz
Insertion Loss 433.80 .... 434.12 MHz	$IL$	--	2.0	4.0	dB
3dB Pass bandwidth (relative to $IL$ )	$BW_3$	670	730	790	kHz
Passband (relative to $IL$ ) 433.76 .... 434.08 MHz		--	1.0	2.0	dB
433.74 .... 434.10 MHz		--	1.0	3.0	dB
433.68 .... 434.16 MHz		--	1.5	6.0	dB
Relative Attenuation (relative to $IL$ ) 10.00 .... 414.00 MHz		45	50	--	dB
414.00 .... 428.00 MHz		35	40	--	dB
428.00 .... 432.84 MHz		15	20	--	dB
434.92 .... 442.00 MHz		10	15	--	dB
442.00 .... 550.00 MHz		35	40	--	dB
550.00 .... 1000.00 MHz		45	50	--	dB

**ⓘ CAUTION: Electrostatic Sensitive Device. Observe precautions for handling!**

#### NOTE:

1. The frequency  $f_c$  is defined as the midpoint between the 3dB frequencies.
2. Unless noted otherwise, all measurements are made with the filter installed in the specified test fixture that is connected to a 50Ω test system with  $V_{SWR} \leq 1.2:1$ . The test fixture L and C are adjusted for minimum insertion loss at the filter center frequency,  $f_c$ . Note that insertion loss, bandwidth, and passband shape are dependent on the impedance matching component values and quality.
3. Unless noted otherwise, specifications apply over the entire specified operating temperature range.
4. The specifications of this device are based on the test circuit shown above and subject to change or obsolescence without notice.
5. All equipment designs utilizing this product must be approved by the appropriate government agency prior to manufacture or sale.
6. Our liability is only assumed for the Surface Acoustic Wave (SAW) component(s) per se, not for applications, processes and circuits implemented within components or assemblies.
7. For questions on technology, prices and delivery please contact our sales offices or e-mail [sales@interquip.com](mailto:sales@interquip.com)