




KMTG1740D

Type: Piezo Transducer

Terminal Shape: SMT

Features: High / Low Temp Resistant, High SPL

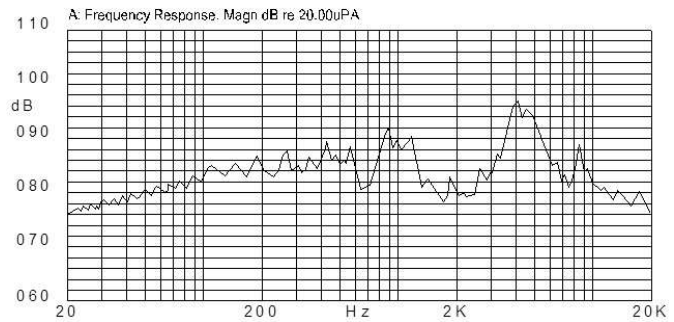

Size	
Installation	SMD
Dimensions (mm)	17.0 (dia) x 6.2 (height)

Electrical characteristics	
Frequency (Hz)	4000 +/- 500
Max current consumption (mA)	12
SPL (dB)	Min 90dB @ 10cm/12V p-p Square wave
Electrostatic capacitance (pF)	16000 +/- 30% @ 100Hz/1V
Tone	Continuous

Environmental	
Operating temp (deg C)	-40~+85
Storage temp (deg C)	-40~+90
Housing material	PPS Black