




SPL (HONG KONG) LIMITED

香港九龍觀塘鴻圖道57號南洋廣場17樓1703B室
Room 1703B, 17/F., Nanyang Plaza, No.57 Hung To Road, Kwun Tong, Kowloon, HK.
Tel: 852-2342 6857 / 2342 6867 Fax: 852-2342 6847 Email: sales@spl-hk.com.hk
Website: www.buzzer.com.hk

External Drive Piezo Transducer SPT46 series

DIMENSIONS

Date : 26 Jun., 2023

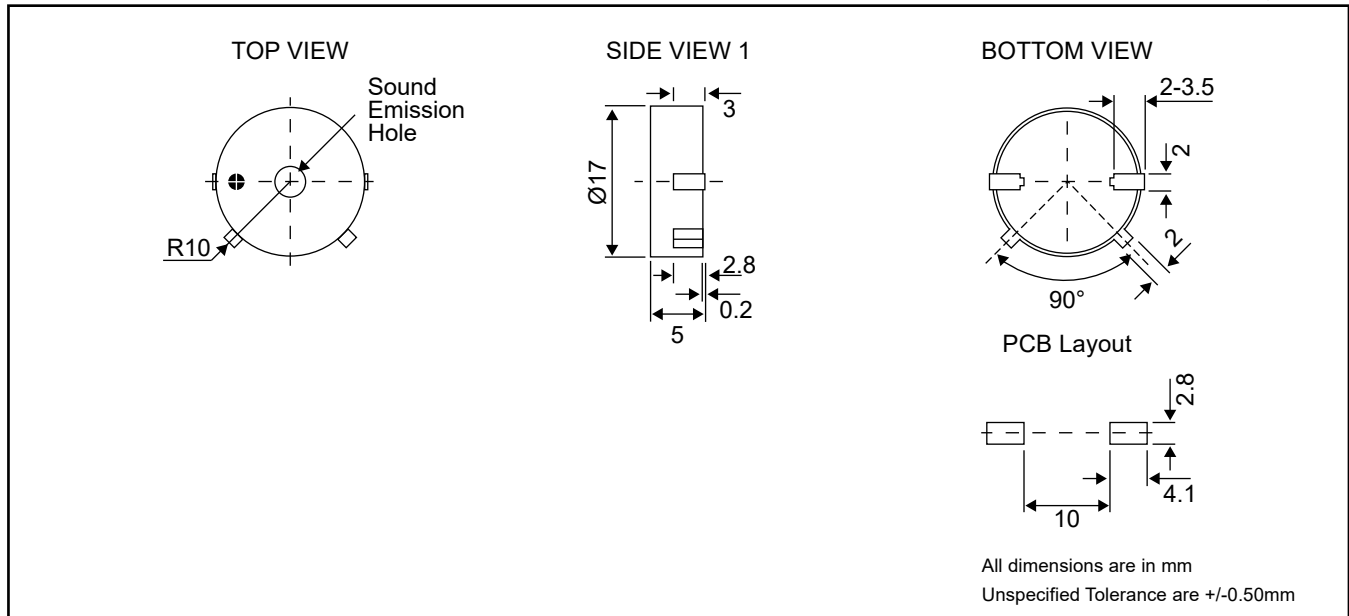

Ref No. : PBCF1401B



ELECTRICAL SPECIFICATIONS

Model No.	PT46-170540SPMR
Sound Pressure Level	90 dBA min. [12 Vp-p, square wave, 10cm, 4000Hz]
Capacitance	15000pF +/- 30% at 100Hz
Max. Input Voltage	30 Vp-p
Heat Test	Must Be Normal [85 +/- 3 °C, 24 Hours]
Cold Test	Must Be Normal [-30 +/- 3 °C, 24 Hours]
Humidity Test	40 +/- 3 °C, 92 ~ 95% R.H. 24 Hours
Operating Temperature	[°C] -20 ~ +75
Storage Temperature	[°C] -30 ~ +85
Terminal	SMD
Housing Material	PPS
Colour	Black
Weight	[gm] 1.3 +/- 8%