



Specifications:

Current rating:2.0A AC/DC  
 Voltage rating:250V AC/DC  
 Contact resistance:20m ohm max.  
 Withstanding Voltage:500V AC/minute  
 Insulation resistance:1000M ohm min.  
 Temperature Rating:-40°C ~ +105°C  
 Materials:

Insulator:High Temp Plastic (Nylon 6T UL94V-0)  
 Standard Color:Ivory  
 Contact:Copper Alloy  
 Plating:Gold Plated  
 Package:500pcs.Reel


How To Order

2208SM-XXG-CR

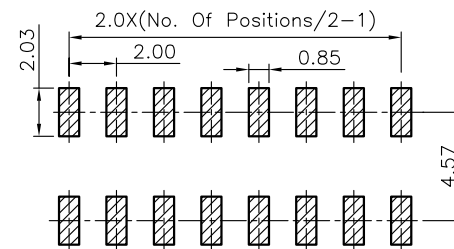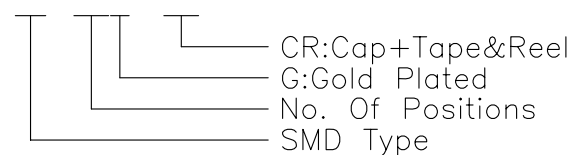

PCB Layout

RoHS Compliant



F				DRAWN: Cel King
E				
D				CHECKED: Jeremy Liu
C				
B	17-Jan-2006	Add color and RoHS	Cel King	APPROVAL: Mike Wu
A	02-Sep-2005	(PC0001)	Wendy	
REV	DATE	FILE	BY	

GENERAL TOLERANCE: .X=±0.20 .XX=±0.15
UNIT: MM
SCALE: 1:1
SHEET: 1 / 1
PROJECTION:

<p>繼德工業股份有限公司  <b>Neltron Industrial Co., Ltd.</b></p>	DESCRIPTION: 2.0mm Pin Header SMD Type Double Rows
	PART NO: 2208SM-XXG-CR

SIZE <b>A4</b>
-------------------