
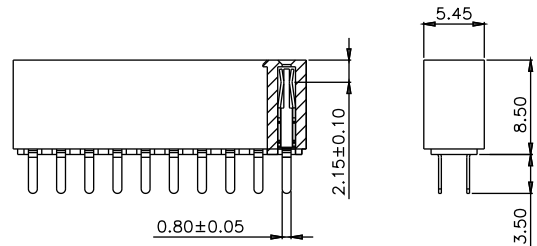
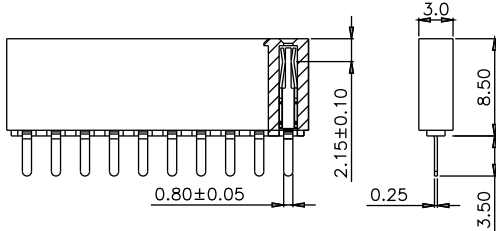



■ Specifications

Current rating:3.0AAC/DC
Voltage rating:250V AC/DC
Contact resistance:20m ohm. max.
Insulation resistance:1000M ohm. Min.
Withstanding voltage:600V AC for one minute
Operating temperature range:-40°C to +105°C

■ Material and Finish

Insulator:High Temp. Plastic(UL94V-0)
Contact:Phosphor Bronze
Plating:Selective Gold Plated



P/N:2212S-XXSG-85-SJ

P/N:2214S-XXSG-85-SJ

■ Engineering Dimension

P/N:2212S-XXSG-85-SJ

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	6.08	2.54	15	39.10	35.56	28	72.12	68.58
3	8.62	5.08	16	41.64	38.10	29	74.66	71.12
4	11.16	7.62	17	44.18	40.64	30	77.20	73.66
5	13.70	10.16	18	46.72	43.18	31	79.74	76.20
6	16.24	12.70	19	49.26	45.72	32	82.28	78.74
7	18.78	15.24	20	51.80	48.26	33	84.82	81.28
8	21.32	17.78	21	54.34	50.80	34	87.36	83.82
9	23.86	20.32	22	56.88	53.34	35	89.90	86.36
10	26.40	22.86	23	59.42	55.88	36	92.44	88.90
11	28.94	25.40	24	61.96	58.42	37	94.98	91.44
12	31.48	27.94	25	64.50	60.96	38	97.52	93.98
13	34.02	30.48	26	67.04	63.50	39	100.06	96.52

P/N:2214S-XXSG-85-SJ

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
4	6.08	2.54	30	39.10	35.56	56	72.12	68.58
6	8.62	5.08	32	41.64	38.10	58	74.66	71.12
8	11.16	7.62	34	44.18	40.64	60	77.20	73.66
10	13.70	10.16	36	46.72	43.18	62	79.74	76.20
12	16.24	12.70	38	49.26	45.72	64	82.28	78.74
14	18.78	15.24	40	51.80	48.26	66	84.82	81.28
16	21.32	17.78	42	54.34	50.80	68	87.36	83.82
18	23.86	20.32	44	56.88	53.34	70	89.90	86.36
20	26.40	22.86	46	59.42	55.88	72	92.44	88.90
22	28.94	25.40	48	61.96	58.42	74	94.98	91.44
24	31.48	27.94	50	64.50	60.96	76	97.52	93.98
26	34.02	30.48	52	67.04	63.50	78	100.06	96.52


■ Ordering Information

2212S-XXSG-85-SJ


① ② ③

① 2212S:Single Row 2214S:Double Rows	② No. of Contacts	③ SG:Selective Gold Plated
---	-------------------	----------------------------

■ Recommended PCB Layout

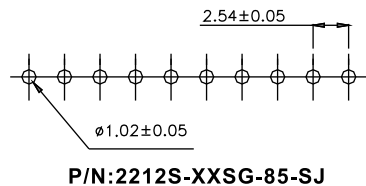

P/N:2212S-XXSG-85-SJ

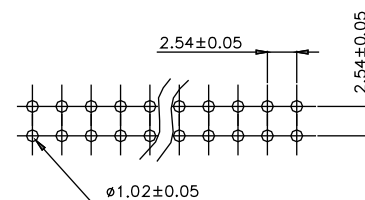

P/N:2214S-XXSG-85-SJ

Unit:mm