

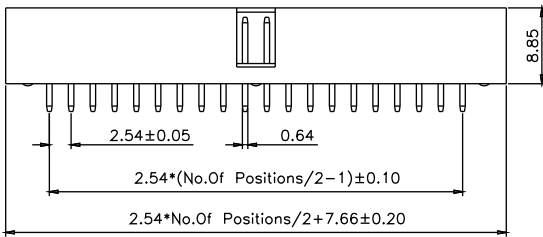


■ **Specifications**


Current rating:3.0AAC/DC  
Voltage rating:250V AC/DC  
Contact resistance:20m ohm. max.  
Insulation resistance:1000M ohm. Min.  
Withstanding voltage:600V AC for one minute  
Operating temperature range:-40°C to +105°C

■ **Material and Finish**


Insulator:High Temp. Plastic(UL94V-0)  
Contact:Copper Alloy  
Plating:Gold Plated



P/N:2316S-XXG



P/N:2316R-XXG



P/N:2316SM-XXG

■ **Ordering Information**

**2316S-XXG**

① ② ③

① S: Straight Type  
R: Right Angle Type

② No. Of Contact  
③ G: Gold


**2316SM-XXG**

① ② ③


① SM: SMD Type

② No. Of Contact  
③ G: Gold

■ **Recommended PCB Layout**

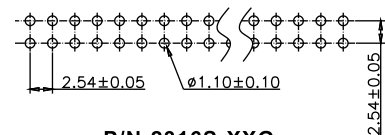

P/N:2316S-XXG  
P/N:2316R-XXG

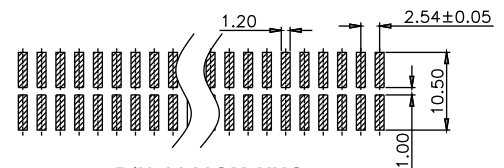

P/N:2316SM-XXG

Unit:mm