
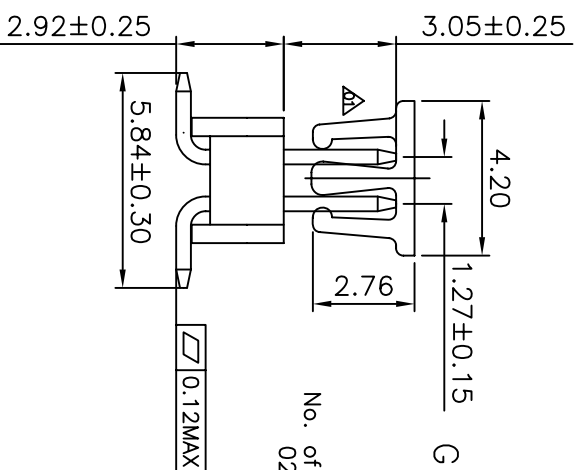


Recommended P.C.Board Layout  
(Tolerance: ±0.05)

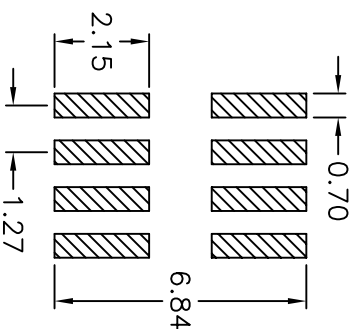

Ordering Information ▲

G PEC212-XX XX A011 C 1 B X

No. of Pins per Row 02~40

Standard Plating      Standard Packing  
 02=Gold Flash      C=Tube  
 Selective Plating      Selective Packing  
 01=Tin      D=Tape Reel  
 05=Gold Flash/Tin      F=Cap+Tape&Reel

Specifications

Current Rating: 1Amp  
 Insulation Resistance: 1000MΩ/Min.  
 Dielectric Withstanding: 300VAC  
 Contact Resistance: 20mΩMax.  
 Operating Temperature: -40°C to +105°C  
 Materials  
 Contact Material: brass  
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 LCP  
 or the equivalent material  
 All materials must meet Greenconn requirement for environment protection.

REV.	LOCALS	DESCRIPTION	DATE	DRAWN
02	▲	Change the cap specifications	2007.03.27	度洪斌
03	▲	變更料號	2008.09.17	彭思城
04	▲	變更圖號並修改注解	2011.04.08	黃明霞

格菱股份有限公司  
Greenconn Corporation

REV.	UNIT.	SCALE.	PAGE.	GENERAL TOLERANCE
04	mm	1:1	1/1	X: ±5.0° .X: ±3.0° .XX: ±2.0° .XXX: ±1.0°

DESIGN:	CHECKED:	AUDITED:	DATE:
黃明霞	李新華	LINK	2011.04.08

DWG. NO.	PART NO.
▲▲▲ GPEC212-CA11CB	▲ GPEC212-XXXXA011C1BX

TITLE.
1.27 PIN HEADER DUAL ROWS SMT TYPE BASE 2.50H