


■ **Specifications**


Current rating:7.0AAC/DC
Voltage rating:250V AC/DC
Contact resistance:10m ohm. max.
Insulation resistance:1000M ohm. Min.
Withstanding voltage:1500V AC for one minute
Operating temperature range:-40°C to +105°C

■ **Material and Finish**



Insulator:High Temp. Plastic(UL94V-0)
Contact:Copper Alloy
Plating:Tin Plated

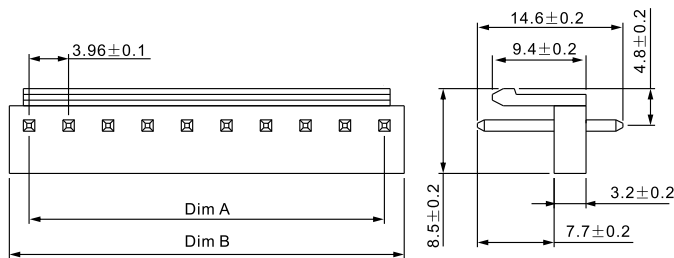

P/N: 2114S-XX

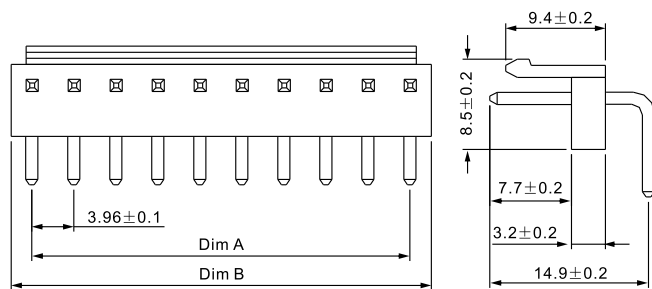

P/N: 2114R-XX

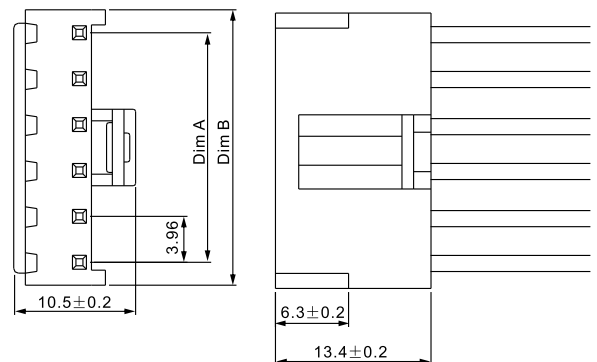

P/N:2114H-XX

■ **Engineering Dimension**

Circuits	Dim. A	Dim. B
2	3.96	7.92
3	7.92	11.88
4	11.88	15.84
5	15.84	19.80
6	19.80	23.76
7	23.76	27.72
8	27.72	31.68
9	31.68	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44
15	55.44	59.40

■ **Ordering Information**


2114S(R)-XX

① ②

① S: Straight Type
R: Right Angle Type

② No. Of Contacts

■ **Recommended PCB Layout**

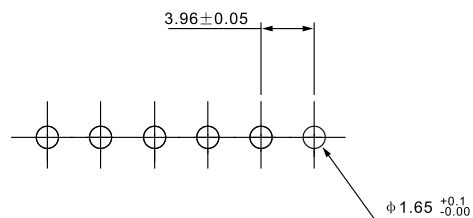

2114H-XX

① ②

① H: Housing

② No. Of Contacts