
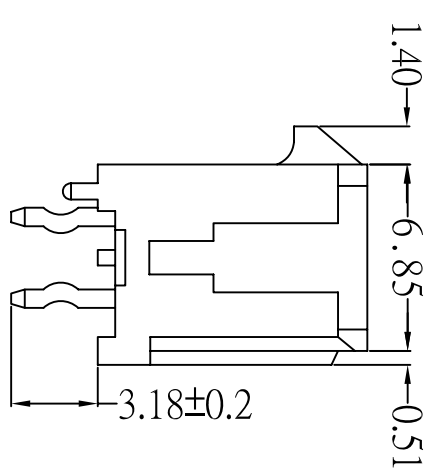


P.C.B. LAYOUT

P/N: W3045V-2*XX
 Available: 2~24pins
 Insulator: Glass Filled Polyamide UL 94V-0
 Color: Black
 Conductor: Brass/Tin plated
 Pin: SQ 0.64mm

Circuits	Dim. A	Dim. B
2	2.50	6.65
4	3.00	9.65
6	6.00	12.65
8	9.00	15.65
10	12.00	18.65
12	15.00	21.65
14	18.00	24.65
16	21.00	27.65
18	24.00	30.65
20	27.00	33.65
22	30.00	36.65
24	33.00	39.65

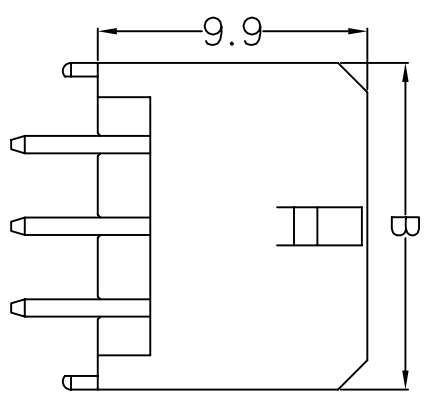

1.3									
1.2									
1.1									
1.0	RELEASED	Li GM	2011-03-14	RSK TECHNOLOGY CO., LTD www.rsk-tech.com		Tel: +86 755 28216712 Fax: +86 755 26982309		Website: www.rsk-tech.com Email: info@rsk-tech.com	
REV.	ECN. NO.	DRBY	DATE	1	2	3	4	5	6
				1	2	3	4	5	6
				X: ±0.30 X: ±5.0° XX: ±0.20 XX: ±3.0° XXX: ±0.15 XXX: ±1.0°		TITLE: WAFER 3.0, VERTICAL TYPE APPD: Xiao Jian CHKD: Wang Zhijun		PART NO: W3045V-2*XX DWG. NO.: W3045V-2*XX	
				UNIT: mm SCALE: 1:1 SHEET: 1/1		DR.: Li Guoming		REV.: 1.0 DATE: 2011-03-14	
				A4					