


SPECIFICATION FOR APPROVAL

COMMODITY	PK CHOKE	SPEC NO.	SP-060828012
ITEM	JPK 0810-102K-0R6-D Green	版本：A	表單編號：QRRD-01-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
	A	9.5	MAX.
	B	11.5	MAX.
	C	16.0	±3.0
	D	0.65	±0.05
	E	5.0	±0.5
	F	3.0	MAX.

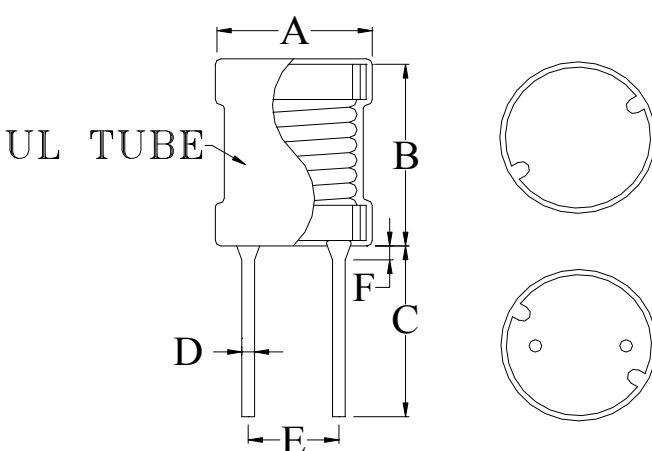


(2) ELECTRICAL CHARACTERISTIC			TEST INSTRUMENTS.
INDUCTANCE	1.0 ± 10%	mH	<input checked="" type="checkbox"/> AGILENT 4294A Precision Impedance Analyzer. <input type="checkbox"/> AGILENT 4285A Precision L.C.R. Meter. <input type="checkbox"/> HP-4286A RF L.C.R. Meter. <input checked="" type="checkbox"/> ZENTECH 3302 Automatic Components Analyzer. <input type="checkbox"/> ZENTECH 101 L.C.R. Meter. <input type="checkbox"/> WAYNE KERR 6420 Precision Impedance Analyzer. <input checked="" type="checkbox"/> ZENTECH 1320 BIAS CURRENT. <input checked="" type="checkbox"/> ZENTECH 502AC Resistance Meter. <input type="checkbox"/> ADEX AX-1155B DC Low Ohm Meter.
TEST FREQUENCY	1	KHz	
TEST VOLT	0.25	V	
RDC	1.81 (max)	Ω	
Isar	0.5 (max)	A	
Irms	0.6 (max)	A	

REMARK :

1. Inductance drop = 10% typ at Isat.
2. ΔT = 40°C rise typ at Irms.

PURCHASER CONFIRMED :	APPROVED	CHECKED	DRAWN
			

SPECIFICATION FOR APPROVAL

COMMODITY	PK CHOKE		SPEC NO.	SP-060828012	
ITEM	JPK 0810-102K-0R6-D	Green	版本：A	表單編號：QRRD-01-02	
(3) Material List					
NO	ITEM	MATERIAL	NOTE		
1	CORE	DR2W 8*10 Or other's equivalent			
2	WIRE	UEW Or other's equivalent	130°C CLASS		
3	SOLDER	100H Or other's equivalent	Silver		
4	TUBE	Heat Shrinkable tube Or other's equivalent	Black		
REMARK :					
PURCHASER CONFIRMED :			APPROVED	CHECKED	DRAWN
					



TEL : 886-2-2689-4971 FAX : 886-2-2689-4260

E-mail : jantek@jantek-elec.com.tw

Web-Site : www.jantek-elec.com.tw