

# MD 012-500M Plug



Pitch: 5.00mm(0.197inch)




## SPECIFICATIONS

			CUL	VDE
負載電壓	Rated Voltage	Bemessungsspannung	AC 300V	
負載電流	Rated Current	Bemessungsstrom	15A	
電線線徑	Wire Size	Leitergrößen	24~16AWG	
塑膠本體	Housing Material	Isolierstofftyp	Polyamide66(UL94V-0)	
押線圈	Cage Clamp	Klemmkörper	Brass, Tin plated	
彈片	Wire protector	Kable Schutz Einrichtung	Phosphor bronze, Tin plated	
螺絲	Screw Size	Schraubengewinde	M2.6, steel, Zinc plated	
操作溫度	Operating Temperature	Umgebungstemperatur	-40°C to + 105°C	
扭力	Torque	Anzugsmoment	3.0 lb-inch	
UL File No.	E167040			

## TABLE

Item No.	A(mm)	A(inch)
MD012-500M02	10.0	0.394
MD012-500M03	15.0	0.591

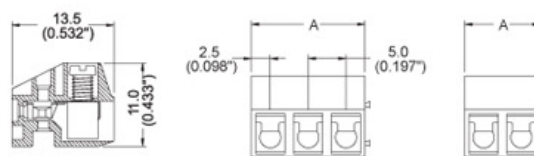

## PCB Layout

Note:  
Screw Plating: Changes are available upon request